


**NO CHIMNEY
REQUIRED - VENTS
UP TO 40 FEET
USING 3"
SCHEDULE 40 PVC,
CPVC OR ABS PIPE***

*100,000 kBtu AND 130,000 kBtu
MODELS ARE CERTIFIED TO VENT
WITH 2" SCHEDULE 40 PVC,
CPVC OR ABS PIPE.

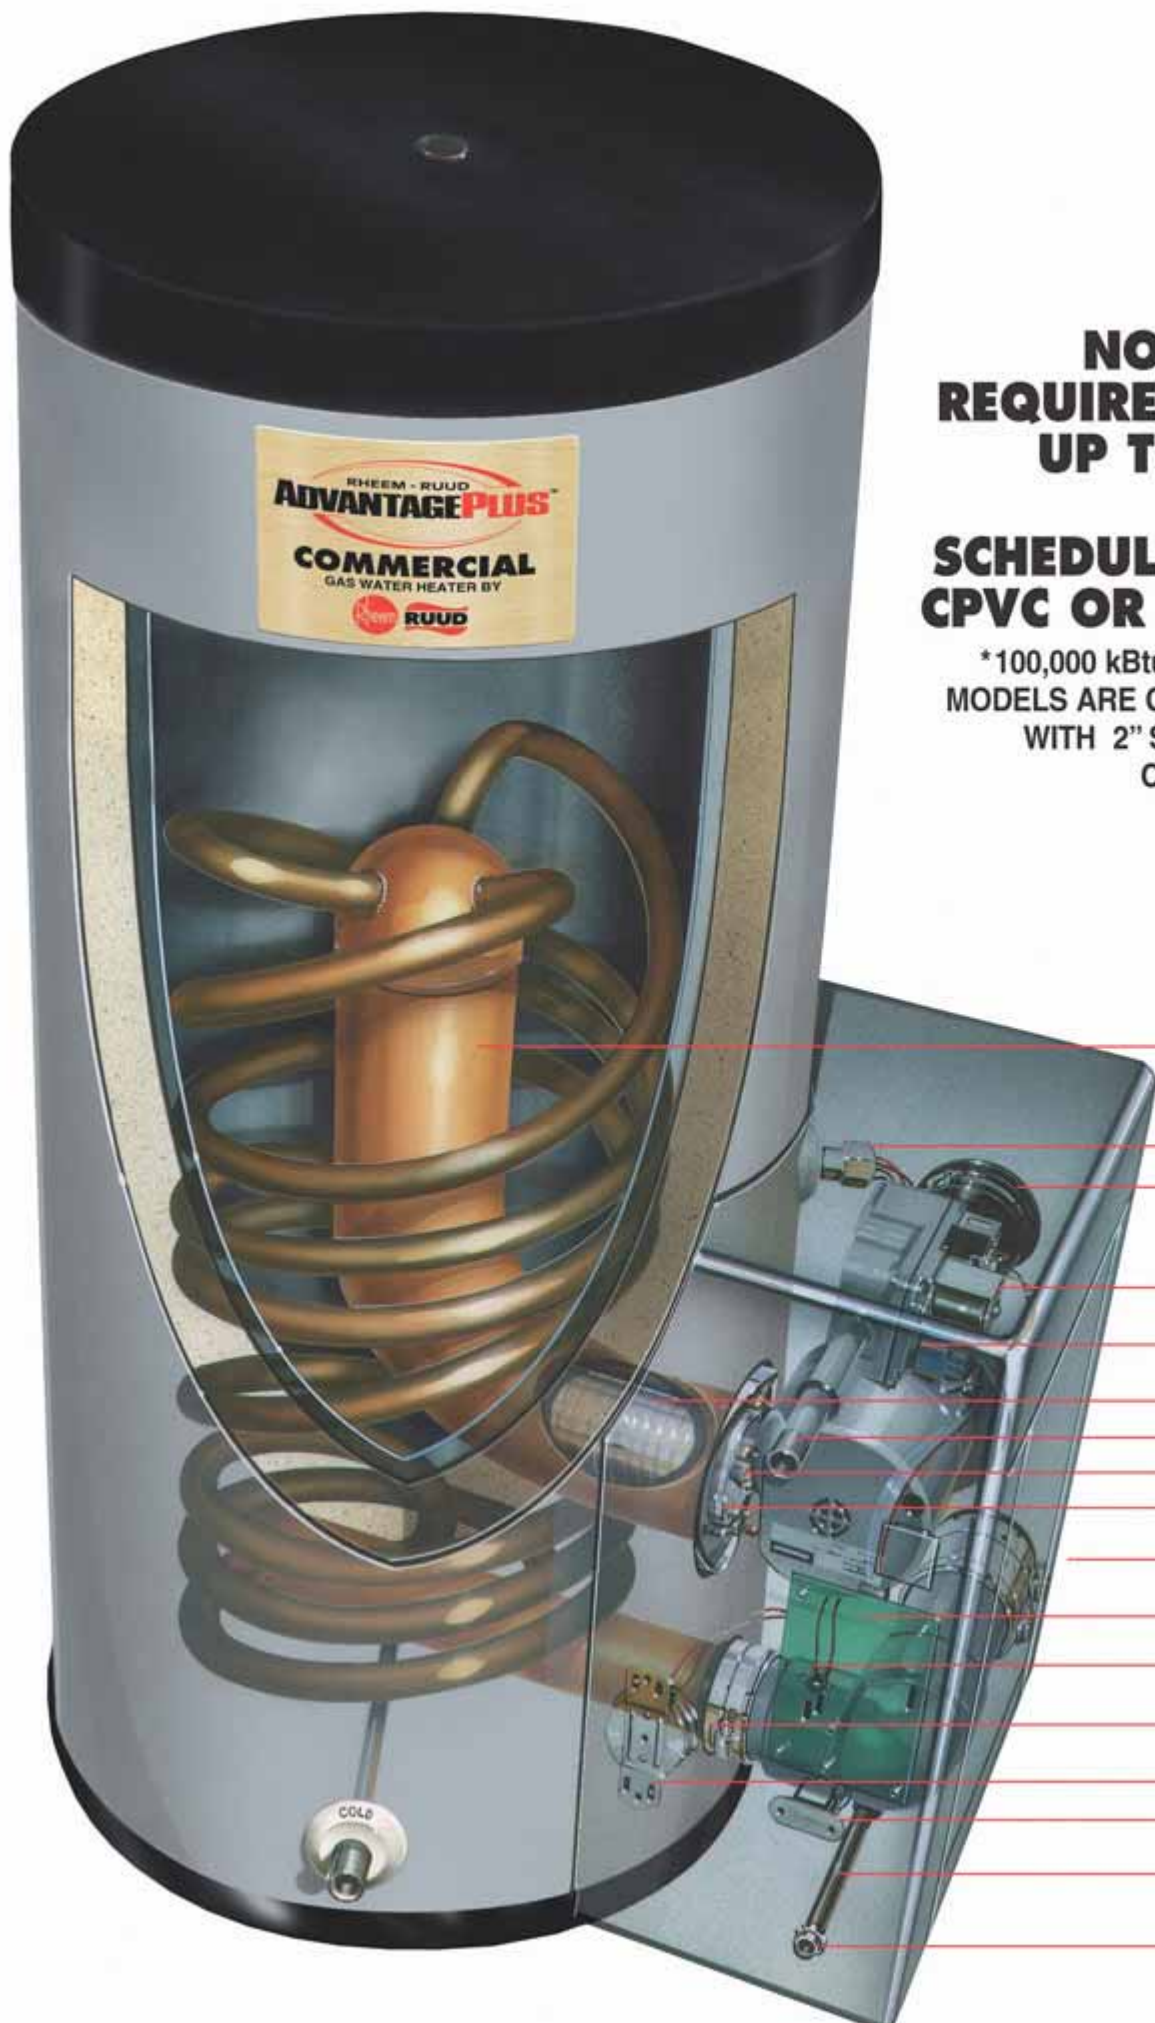

Heat Exchanger/
Combustion Chamber

Control Well and E.C.O.

Air Inlet Connector

Gas Valve

Combustion Blower

Gas Burner

Gas Inlet Nipple 1/2"

Hot Surface Ignitor

Flame Probe

Exhaust Outlet Connector

Control Board

Vent Over-Temp
Reset Switch

Exhaust Elbow and Drain

Pressure Switch

Transformer

Condensate Connector
Hose

Condensate Connector