




COMMERCIAL

LARGE VOLUME STORAGE TANKS



Standard Features:

- Available in jacketed and non-jacketed models
- 200, 260, 320, 430, 500, 750 and 950 gallon capacities
- Porcelain enamel lined tank
- Heavy duty anode rods
- 2" of rigid foam insulation
- Baked enamel steel jacket
- 5 year limited warranty
- All large volume commercial storage tanks are certified to ASME heater and pressure vessel code standards

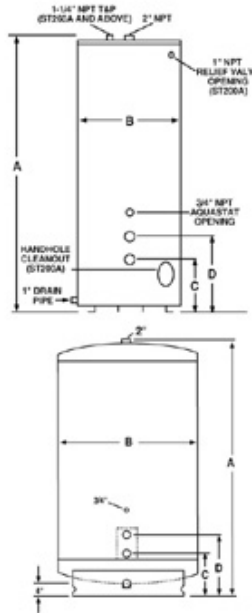

TANK INFORMATION (Shown in English & Metric)

MODEL NUMBER	TANK CAPACITY		MAXIMUM WORKING PRESSURE ASME
	GALLONS	LITERS	
ST(U)200A	200	758	150 PSI 1034 kPa
ST(U)260A	257	974	125 PSI 862 kPa
ST(U)320A	318	1205	125 PSI 862 kPa
ST(U)430A	432	1637	125 PSI 862 kPa
ST(U)500A	504	1910	125 PSI 862 kPa
ST(U)750A	752	2850	125 PSI 862 kPa
ST(U)950A	940	3563	125 PSI 862 kPa

DIMENSIONAL INFORMATION FOR VERTICAL ROUND JACKETED STORAGE TANKS

(All dimensions shown in English and Metric)

MODEL NUMBER	UNITS	A	B	C	D	WATER CONNECTIONS		APPROX. SHIPPING WEIGHT
						TOP OUTLET	FRONT SIDE	
ST200A	inches	77-1/4	32	11-1/2	17-1/4	2	2-1/2	500 lbs.
	mm	1962	813	292	438	51	63.5	227 kgs.
ST260A	inches	95-1/2	34	18	26	2	3	1108 lbs.
	mm	2426	864	457	660	51	76	503 kgs.
ST320A	inches	84-1/2	40	19-3/4	27-1/4	2	3	1290 lbs.
	mm	2146	1016	502	692	51	76	586 kgs.
ST430A	inches	84-1/2	46	21	29	2	3	1626 lbs.
	mm	2146	1168	533	737	51	76	738 kgs.
ST500A	inches	94-1/2	46	21	29	2	3	1765 lbs.
	mm	2400	1168	533	737	51	76	801 kgs.
ST750A	inches	107-1/2	54	22-7/8	30-7/8	2	3	2330 lbs.
	mm	2731	1372	581	784	51	76	1058 kgs.
ST950A	inches	131-1/2	54	22-7/8	30-7/8	2	3	3010 lbs.
	mm	3340	1372	581	784	51	76	1367 kgs.

DIMENSIONAL INFORMATION FOR VERTICAL BARE (NON-JACKETED) STORAGE TANKS

(All dimensions shown in English and Metric)

MODEL NUMBER	UNITS	A	B	C	D	WATER CONNECTIONS		APPROX. SHIPPING WEIGHT
						TOP OUTLET	FRONT SIDE	
STU200A	inches	75-3/4	28	14-5/8	18	2	3	488 lbs.
	mm	1924	711	371	457	51	76	222 kgs.
STU260A	inches	88	30	15-3/4	23-3/4	2	3	464 lbs.
	mm	2235	762	400	603	51	76	211 kgs.
STU320A	inches	76	36	17-3/8	25-3/8	2	3	574 lbs.
	mm	1930	914	441	645	51	76	261 kgs.
STU430A	inches	76	42	18-7/8	26-7/8	2	3	816 lbs.
	mm	1930	1067	479	683	51	76	370 kgs.
STU500A	inches	88	42	18-7/8	26-7/8	2	3	925 lbs.
	mm	2235	1067	479	683	51	76	420 kgs.
STU750A	inches	100	48	20-7/8	28-7/8	2	3	1387 lbs.
	mm	2540	1219	530	733	51	76	630 kgs.
STU950A	inches	124	48	20-7/8	28-7/8	2	3	1651 lbs.
	mm	3150	1219	530	733	51	76	750 kgs.

Jacketed models meet or exceed the minimum efficiency requirements of ASHRAE Standard 90.1b-1992 (Part of the Federally mandated Energy Policy Act (EPact)).

